

UNICARRIERS®

□FORKLIFT□

BXCQ Series



Electric Counterbalanced Forklifts

36 & 48 Volt AC-Powered

4,000 - 8,000 lbs. Capacities | Cushion Tire



BXCQ Series Applications

Industry-leading maneuverability and hydraulic performance with higher capacity retention and advanced control systems make the BXCQ series *the* choice for demanding applications, including:

- Manufacturing • Warehousing • Distribution
- Bottling • Food Products • Transportation
- Chemical and Allied Products • Rubber and Plastics
- Metal Products • Electronic and Electric Products
- Textile Products • Rental Options For Seasonal Demands

WORKHORSE VALUE. ELECTRIC EFFICIENCY.



NEVER QUIT.

It defines our forklifts and the company that builds them.

Over the course of a century, the company known as UniCarriers took shape. As we grew and evolved into a US manufacturer with a global reach in nearly 100 countries worldwide, much has changed, but one thing hasn't: our mission. UniCarriers is committed to providing you with the ultimate in reliability, performance, and value.

And that commitment can be seen in the BXCQ Series, a versatile lift truck that combines a capacity of up to 8,000 lbs. and exceptional power, efficiency and advanced operator assistance controls that include the Intelligent Curve Control and Passive Sway Control. Plus, it's backed by the best standard, unlimited warranty in the business. Add UniCarriers legendary reliability, ease-of-maintenance and preset performance modes — and you have the right forklift to move your products, and your business, forward.



Up Your UpTime

Discover reliability features that cut downtime and keep your business up and running



Comfort Zone

Your drivers and your entire operation will benefit from our comfort & productivity features



Power & Performance

100% AC motors and controllers are only the beginning of our performance advantages



Sweet Savings

The BXCQ is designed to deliver you a low cost of ownership year after year after year



Play It Safe

Safety is everybody's business, and the BXCQ is all business when it comes to safety



Control Freak

With the BXCQ, you're in complete control when it comes to managing costs and productivity




Make It Yours

Already well appointed, the BXCQ can be customized to meet your specific needs



To learn more, and a find a dealer near you, visit LogisnextAmericas.com/UniCarriers

Up Your UpTime

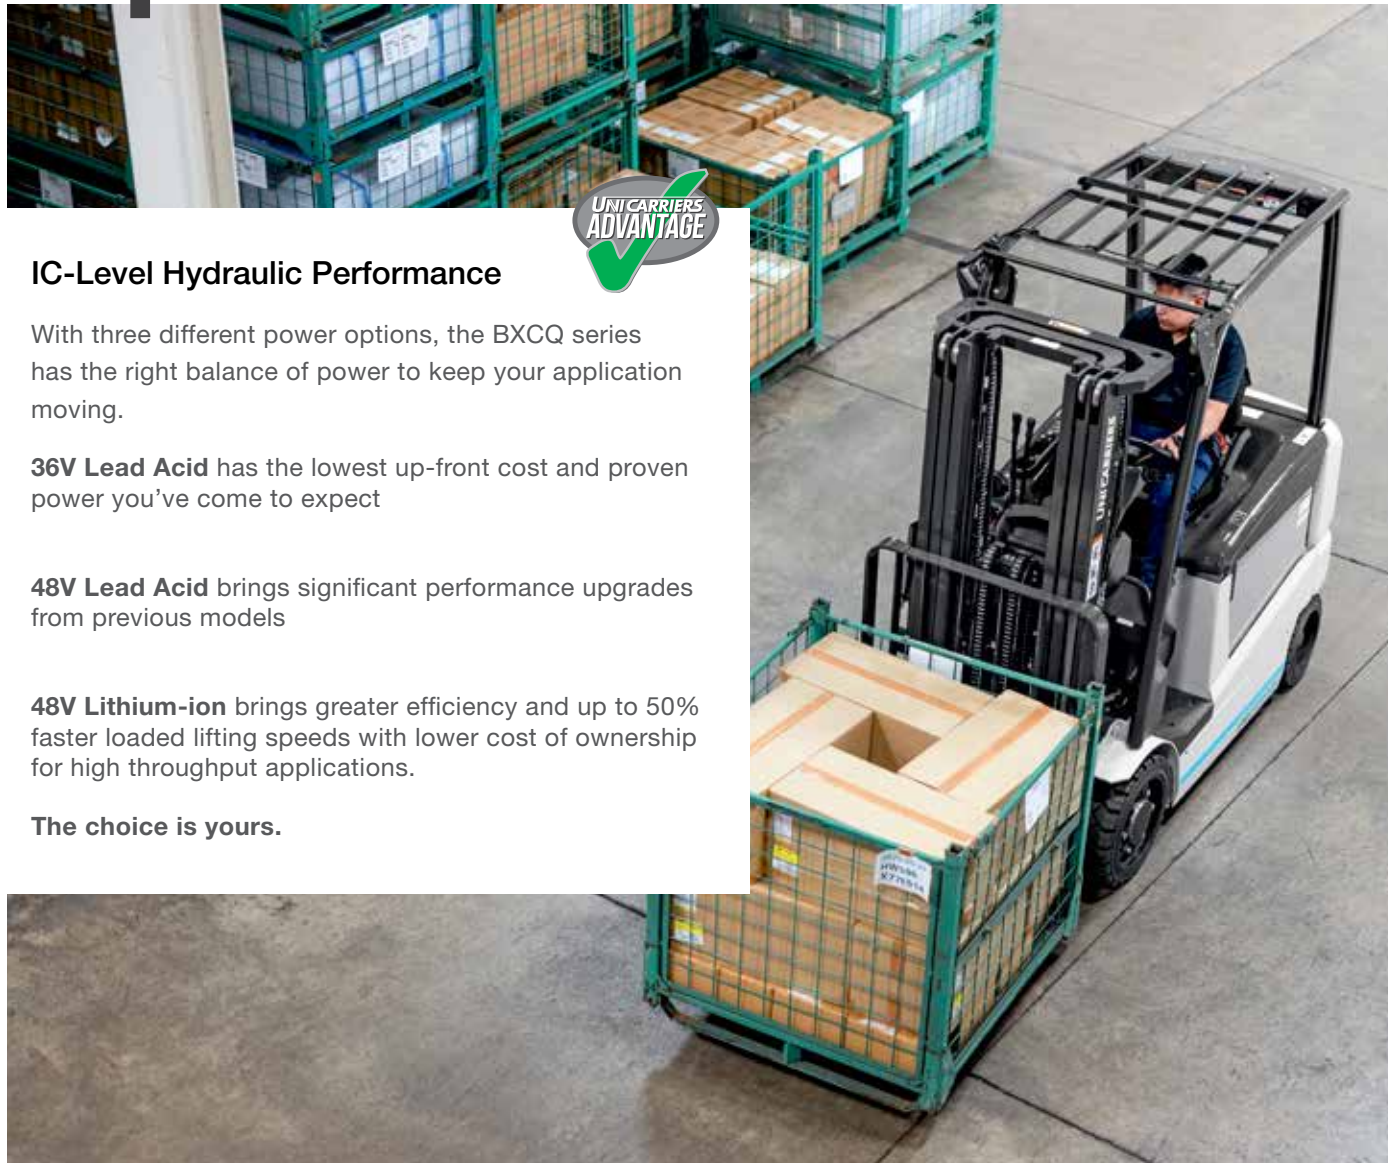

IC-Level Hydraulic Performance

With three different power options, the BXCQ series has the right balance of power to keep your application moving.

36V Lead Acid has the lowest up-front cost and proven power you've come to expect

48V Lead Acid brings significant performance upgrades from previous models

48V Lithium-ion brings greater efficiency and up to 50% faster loaded lifting speeds with lower cost of ownership for high throughput applications.

The choice is yours.

Benefits of Moving to Lithium-Ion Technology

- Fast charging throughout the course of the shift during breaks allows the truck to stay charged when customers need it.
- Li-Ion Batteries are smart power solutions designed to communicate directly with the truck resulting in increased efficiency and output.
- The Li-Ion solution is completely maintenance free, which can help reduce overall cost of ownership and the downtime associated with maintaining and caring for traditional lead acid batteries.
- Battery lift expectancy of up to 4,000 full cycles (vs. 900 to 1,200 cycles in lead-acid batteries).
- No gas is produced during charging and no acid is contained in the battery as compared with conventional lead-acid batteries.



Dependable Dual-Drive Unit


Our pair of brushless AC induction drive motors are self-contained units that incorporate robust gear boxes and a wet disc brake system. The result? Greater dependability and higher performance.

Simplified Battery Maintenance & Replacement

Gas assist struts simplify battery access and mechanically lock at **nearly 90 degrees** making routine battery maintenance and change-outs faster. Optional slide extraction* further simplifies battery removal.

Real-time Warnings & Diagnostics

Integrated onboard diagnostics provide immediate truck status. Warnings appear via icons and detail on the bottom of the screen, so troubleshooting is quick and easy and the unit is back in operation faster.

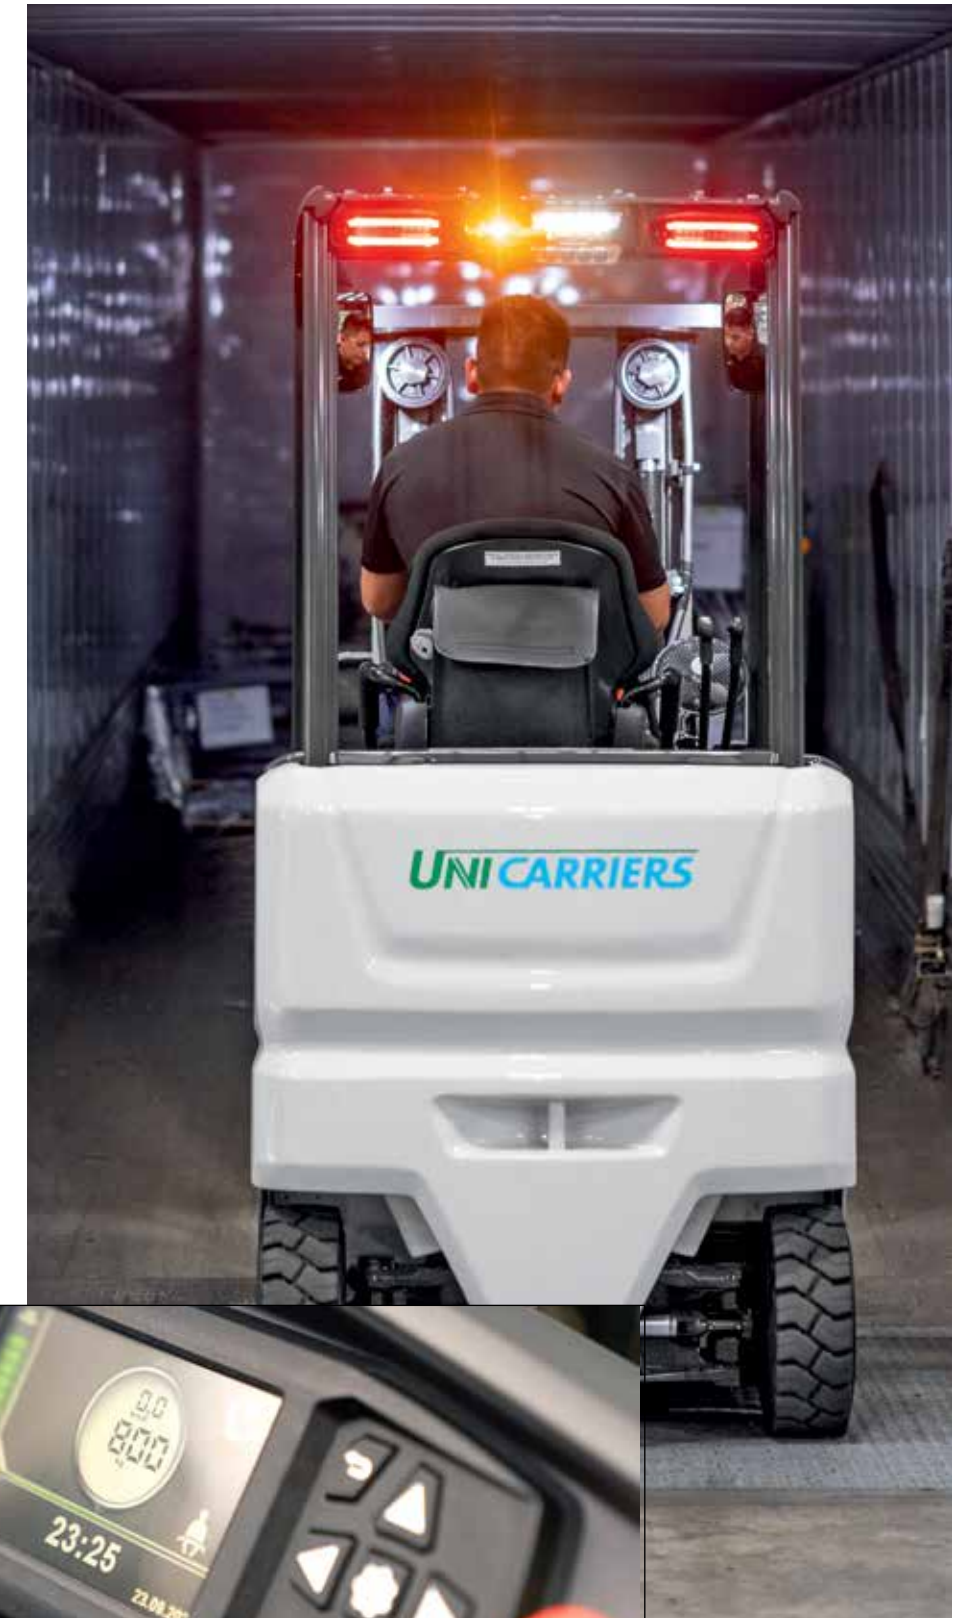



Comfort Zone

Work comes first, but there are designed comforts that make the experience more enjoyable. Comfortable operators are statistically more productive.



Superior Visibility

Offset steering column, a low-profile and narrow dashboard, and your choice of an OptiView® mast – together these features produce clear sightlines for loading and moving in all directions.



Our Seat Supports Your Driver and Your Productivity

The lumbar support and weight adjustments create customized comfort for the operator, while a non-cinching seatbelt allows a wider range of movement. The full suspension design absorbs shocks for a smoother, more comfortable ride — and it's all standard on BXCQ Series forklifts.

Lumbar support adjustment

Weight adjustment

Improved Control and Security

Maneuverability during reverse driving is easier with an optional rear right assist grip with horn button. It helps keep the operator's hand inside the compartment where it belongs.



Low profile dashboard

Optional Mini-Steering Wheel

Extra legroom

Low-profile Counterweight



Power & Performance

Highly Responsive, Highly Productive.
The BXCQ Series' AC power system delivers responsive, precise control for greater productivity throughout the work cycle. Faster acceleration, higher top travel speeds and infinitely variable lift/lower control mean more work is completed, faster.


2+1 Performance Modes = Find The Right Balance Of Productivity And Energy Efficiency For Your Application.

The BXCQ Series features adjustable settings to optimize performance based on the application, work environment or operator experience. ECO, PRO that are easily selectable through the rotation of the key switch (1/2 turn = ECO, 1 turn = PRO).



Adjustable Performance Settings
The specific performance of both modes can be fine-tuned for your operation via the Truck Tool.

- E ECO Mode**
Extended operating hours achieved with only slightly reduced performance. Li-ion trucks with electronic controls use 10% less energy in this mode
- P PRO Mode**
Offers high-performance settings for heavy-duty applications.

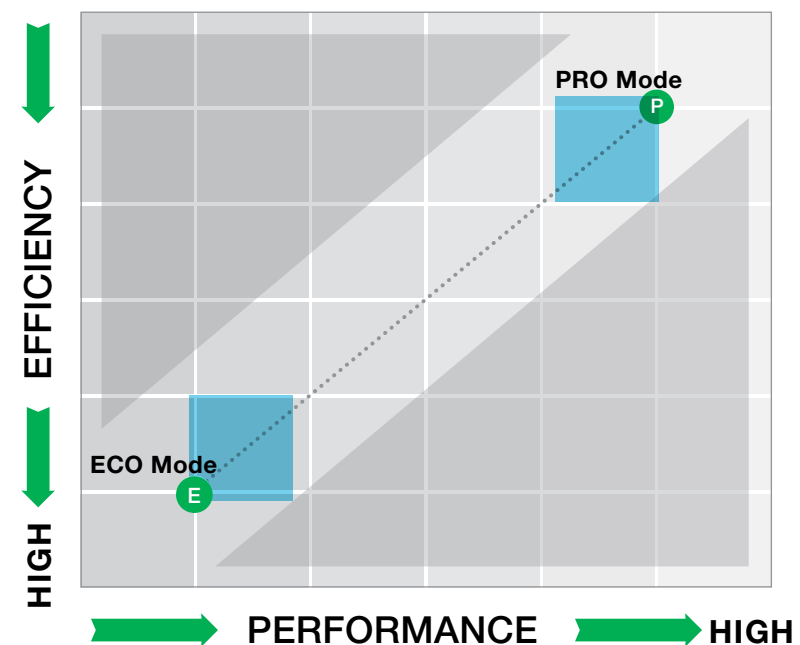

Rugged UniCarriers Designed and Manufactured Mast

Our mast features rolled steel channels and thick inner rails for increased capacity retention. Side thrust rollers on the fork carriage are easily accessed for carriage adjustment.

Fast Acceleration, Travel and Lift Speeds

Use the high performance setting to reach top speeds and optimize productivity.

Travel Speeds

48V Lead Acid
11.3/11.3 MPH

*48V Li-Ion**
11.3/12.5 MPH

Full load / No load

Lift Speeds

48V Lead Acid
88.7/120.0 FPM

*48V Li-Ion**
110.2/120.0 FPM

Full load / No load

* Max performance from Li-Ion requires Fingertip or Joystick controls

Sweet Savings



Saving Time with every Service

For when you have to service, all major components are easily accessible from either the side panels, or easily removable floor panel.

Minimize Preventable Repairs

Operators are more likely to perform regular lift truck inspections if they are easy to do. Access to hydraulic and brake fluids is convenient, making daily checks or required refills simple, so operators can focus on the job ahead.

Save Precious Battery Power

Industrial batteries can be a significant part of your operational expenses. The BXCQ incorporates power saving features to optimize battery usage so you can get the most out of your investment.

- Advanced regenerative technology **reclaims power**, lowering power consumption and **reducing component wear** through less heat generation — to keep your equipment **operating longer**, with less time in the charging bay.
- An auto power-off cuts the electrical system if the forklift sits idle. Select an allowable idle time between 15 and 60 minutes before the vehicle powers down.
- On-demand power steering system draws battery power only when required.

Play It Safe



Seeing is Believing

Cylinders are positioned behind the mast rails resulting in excellent visibility for the operator. Ideal for facilities that transport delicate loads, our optional OptiView® mast makes fork positioning and load handling easier.



Operator Presence System



This comprehensive system includes a **seat-actuated power interrupt with mast-lock**, automatically preventing lift and tilt operations if the operator leaves the seat. The **return-to-neutral** feature minimizes forklift movement if the operator leaves the truck while still in gear. Other audible and visual warnings come standard, including a **seatbelt alarm**.

Forward Thinking Back Up Alarm

Our back-up alarm provides plenty of notice to pedestrians and other drivers in the area. For applications with varying noise levels, there is an optional self-adjusting alarm that adjusts sound volume based on ambient noise levels.

Reverse driving actuates optional blue spotlight to illuminate the floor, for advanced visual warning.

Control Freak

Maintain Control

When traveling on inclines, our **Ramp Hold** feature prevents rollback and **Traction Boost** feature draws more power to the motors temporarily to maintain consistent speeds while on ramps.



Single Handle Control Lever

Faster, easier and more fluid, our single handle control **combines both lift and tilt functions for greater productivity**. It is standard equipment on the BXCQ Series—and not available from any other forklift brand. Separate control levers are available at no charge.



Load Stability during Travel and Lifting/Lowering

Automatic control features sense the operating conditions and respond to balance load handling productivity. **Curve control** senses speed and steer angle to slow the truck when needed. **Passive Sway Control** senses mast movement (at heights above 12.5 ft) and absorbs mast sway into the gear-box and chassis.

Sensitive to Your Acceleration Needs

Within the BXCQ control system, the quicker the accelerator pedal is depressed, the faster the lift truck will respond to your command for speed. This feature is ideal for fast paced operations and where long runs are common. Operators can also maintain a slower acceleration rate by reducing their pedal force when pedestrians are present or in more confined areas of the warehouse. In addition, the operator can adjust the acceleration rate through the Truck Tool, for even faster or slower response.



Make it Yours

Choose from a variety of options to customize your ride. If you don't see what you need, contact your authorized UniCarriers dealer for help.

Option Availability



Light Options



Fingertip Controls



Hydraulic Quick Disconnect



Freezer Package



Mini-Steering Wheel

FEATURES	
Full-color LED display	●
Hydraulic 100 degree steer axle	●
AC motor system	●
Regenerative braking system	●
Selectable performance modes	●
LED forward working lights	●
Presence detection system	●
Full-suspension vinyl seat	●
Load Weight Indicator	○
Fingertip controls	○
Automatic operator assistance controls (Curve control, Lift Control, Sway Control & more)	●

● Standard ○ Optional



Specifications

CUSHION TIRE 4000 – 8000 LB. MODELS

CHARACTERISTICS																
				BXC40Q		BXC50CQ		BXC50Q			BXC60Q		BXC65Q		BXC80Q	
1	Capacity at rated load center	lb	kg	4,000	1,814	5,000	2,268	5,000	2,268	1	6,000	2,721	6,500	2,948	8,000	3,628
2	Load center -- distance	in	mm	24	600	24	500	24	500	2	24	600	24	500	24	600
3	Power – diesel, gasoline, LP gas, electric			electric		Electric		Electric		3	Electric		Electric		Electric	
4	Tire type – cushion, solid pneumatic			cushion		Cushion		Cushion		4	Cushion		Cushion		Cushion	
5	Wheels (x=driven) number front / rear			2x / 2		2x / 2		2x / 2		5	2x / 2		2x / 2		2x / 2	
DIMENSIONS																
6	Maximum fork height (top of forks)	in	mm	107.9	2,740	107.9	2,740	107.9	2,740	6	153.5	3,900	159.4	4,050	159.4	4,050
7	Free lift	in	mm	4.2	106	4.2	106	4.2	106	7	29.6	752	29.6	752	29.6	752
8	Forks – thickness x length x width	in	mm	1.5 x 4 x 42.1	38 x 102 x 1,070	1.5 x 4 x 42.1	38 x 102 x 1,070	1.5 x 4 x 42.1	38 x 102 x 1,070	8	2.0 x 5 x 42.1	51 x 127 x 1,070	2.0 x 5 x 42.1	51 x 127 x 1,070	2.0 x 5 x 42.1	51 x 127 x 1,070
9	Fork carriagee width	in	mm	36.2	920	36.2	920	36.2	920	9	40.2	1,020	40.2	1,020	40.2	1,020
10	Fork carriage ISO 232, class / type A, B			Class 2/ Type A		Class 2/ Type A		Class 2/ Type A		10	Class 3/ Type A		Class 3/ Type A		Class 3/ Type A	
11	Tilt – forward / backward	deg		5 / 8		5 / 8		5 / 8		11	5 / 5		5 / 5		5 / 5	
12	Overall length (with 42" long forks)	in	mm	127.2	3,232	127.2	3,232	130.8	3,322	12	132.4	3,363	133	3,378	136.3	3,463
13	Length to fork face (includes fork thickness)	in	mm	85	2,162	85	2,162	88.7	2,252	13	90.3	2,293	90.7	2,308	94.2	2,393
14	Overall width with single tires	in	mm	42.1	1,070	42.1	1,070	42.1	1,070	14	43.3	1,100	43.3	1,100	43.3	1,100
15	Height to top of lowered mast	in	mm	71.3	1,810	71.3	1,810	71.3s	1,810	15	77.2	1,960	77.2	1,960	77.2	1,960
16	Seat height to SIP	in	mm	50	1,275	50	1,275	50	1,275	16	50	1,275	50	1,275	50	1,275
17	Height to top of overhead guard	in	mm	88	2,235	88	2,235	88	2,235	17	88	2,235	88	2,235	88	2,235
18	Drawbar pin height (middle)	in	mm	22.7	577	22.7	577	22.7	577	18	22.7	577	22.7	577	22.7	577
19	Height with mast raised	in	mm	155.7	3,954	155.7	3,954	155.7	3,954	19	201.1	5,108	201.1	5,108	201.1	5,108
20	Minimum outside turning radius	in	mm	68.5	1,740	68.5	1,740	72.0	1,830	20	72.0	1,830	72.6	1,845	76.0	1,930
21	Minimum aisle – 90° stack - zero clearance without load	in	mm	85.1	2,162	85.1	2,162	88.7	2,252	21	90.3	2,293	90.7	2,308	94.2	2,393
PERFORMANCE																
22	Travel speed – loaded / empty (36 volt lead-acid)	mph	km/h	10.3 / 10.8	16.6 / 17.4	9.6 / 10.8	15.4 / 17.4	9.6 / 10.8	15.4 / 17.4	22	9.1 / 10.6	14.6 / 17.1	9.1 / 10.6	14.6 / 17.1	9.1 / 10.6	14.6 / 17.1
23	Travel speed – loaded / empty (48 volt lead-acid)	mph	km/h	11.3 / 11.3	18.2 / 18.2	11.3 / 11.3	18.2 / 18.2	11.3 / 11.3	18.2 / 18.2	23	11.3 / 11.3	18.2 / 18.2	11.3 / 11.3	18.2 / 18.2	11.3 / 11.3	18.2 / 18.2
24	Travel speed – loaded / empty (48 volt li-ion)	mph	km/h	12.3 / 12.5	19.8 / 20.1	12.3 / 12.5	19.8 / 20.1	12.3 / 12.5	19.8 / 20.1	24	12.3 / 12.5	19.8 / 20.1	12.3 / 12.5	19.8 / 20.1	12.3 / 12.5	19.8 / 20.1
25	Lift speed – loaded / empty (36 volt lead-acid) manual	fpm	m/s	66.4 / 84.5	0.34 / 0.43	62.3 / 85.4	0.32 / 0.43	62.3 / 85.4	0.32 / 0.43	25	52.8 / 72.3	0.27 / 0.37	50.7 / 68.7	0.26 / 0.35	47.7 / 68.7	0.24 / 0.35
	Lift speed – loaded / empty (36 volt lead-acid) fingertip			69.9 / 100.4		69.9 / 100.4		69.9 / 100.4			58.8 / 95.5		50.0 / 77.8		50.0 / 77.7	
26	Lift speed – loaded / empty (48 volt lead-acid) manual	fpm	m/s	71.3 / 104.2	0.36 / 0.53	66.4 / 104.2	0.34 / 0.53	66.4 / 104.2	0.34 / 0.53	26	55.6 / 89.9	0.28 / 0.46	50.9 / 70.6	0.26 / 0.36	47.2 / 70.6	0.24 / 0.36
	Lift speed – loaded / empty (48 volt lead-acid) fingertip			88.7 / 120.0		88.7 / 120.0		88.7 / 120.0			75.8 / 106.4		64.4 / 90.7		64.4 / 90.7	
27	Lift speed – loaded / empty (48 volt li-ion) manual	fpm	m/s	78.6 / 107.6	0.40 / 0.55	73.7 / 107.6	0.37 / 0.55	73.7 / 107.6	0.37 / 0.55	27	62.7 / 93.3	0.32 / 0.47	56.2 / 72.0	0.29 / 0.37	53.3 / 72.0	0.27 / 0.37
	Lift speed – loaded / empty (48 volt li-ion) fingertip			110.2 / 120.0		110.2 / 120.0		110.2 / 120.0			86.6 / 110.2		79.7 / 92.5		79.7 / 92.5	
28	Lowering speed – loaded / empty	fpm	m/s	94.5 / 79	0.48 / 0.40	94.5 / 79	0.48 / 0.40	94.5 / 79	0.48 / 0.40	28	96.5 / 96.5	0.49 / 0.49	98.5 / 98.5	0.50 / 0.50	76.8 / 76.8	0.39 / 0.39
29	Maximum gradeability – loaded / empty	%		32		32		31		29	32		30		24	
WEIGHT																
30	Empty – without battery	lb	kg	5,853	2,655	6,747	3,060	6,247	2,834	30	8,394	3,807	8,780	3,983	9,797	4,444
31	Axle load – with rated load (front / rear)(w/ minimum battery)	lb	kg	11,137 / 1,115	5,052 / 506	12,508 / 1,454	5,674 / 659	12,490 / 1,656	5,665 / 751	31	15,864 / 1,630	7,196 / 739	16,694 / 1,686	7,572 / 765	18,872 / 1,930	8,560 / 875
32	Axle load – without rated load (front / rear)(w/ minimum battery)	lb	kg	3,955 / 4,297	1,794	1,949	3,863 / 5,283	4,220 / 5,126	1,914 / 2,325	32	5,519 / 5,975	2,503 / 2,710	5,487 / 6,393	2,489 / 2,900	5,242 / 7,655	2,378 / 3,472
CHASSIS																
33	Tire size – front	in		21 x 7 x 15		21 x 7 x 15		21 x 7 x 15		33	22 x 8 x 16		22 x 3 x 16		22 x 8 x 16	
34	Tire size – rear	in		16.25 x 6 x 11.25		16.25 x 6 x 11.25		16.25 x 6 x 11.25		34	16.25 x 6 x 11.25		16.25 x 6 x 11.25		16.25 x 6 x 11.25	
35	Wheelbase	in	mm	57	1,450	57	1,450	70	1,549	35	70	1,549	70	1,549	70	1,549
36	Tread width – front, standard tires	in	mm	35.1	892	35.1	892	35.1	892	36	35.3	897	35.3	897	35.3	897
37	Tread width – rear tires	in	mm	35	888	35	888	35	888	37	35	888	35	888	35	888
38	Ground clearance – at lowest point at mast	in	mm	3.1	78.7	3.1	78.7	3.1	78.7	38	3.1	78.7	3.1	78.7	3.1	78.7
39	Ground clearance – at center of wheelbase	in	mm	4.4	112.5	4.4	112.5	4.4	112.5	39	4.4	112.5	4.4	112.5	4.4	112.5
40	Service brakes	type		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		40	foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
41	Parking brakes	type		automatic, hydraulic		automatic, hydraulic		automatic, hydraulic		41	automatic, hydraulic		automatic, hydraulic		automatic, hydraulic	
ELECTRICAL																
42	Battery type			lead-acid / li-ion		lead-acid / li-ion		lead-acid / li-ion		42	lead-acid / li-ion		lead-acid / li-ion		lead-acid / li-ion	
43	Battery weight, minimum	lb	kg	2,400	1,089	2,400	1,089	3,100	1,406	43	3,100	1,406	3,100	1,406	3,100	1,406
44	Battery weight, maximum	lb	kg	3,240	1,469	3,240	1,469	3,970	1,800	44	3,970	1,800	3,970	1,800	3,970	1,800
45	Battery compartment size, maximum	in	mm	39.5 x 30.5 x 22.8	1,000 x 775 x 580	39.5 x 30.5 x 22.8	1,000 x 775 x 580	39.5 x 34.3 x 22.8	1,000 x 870 x 580	45	39.5 x 34.4 x 22.8	1,000 x 870 x 580	39.5 x 34.3 x 22.8	1,000 x 870 x 580	39.5 x 34.3 x 22.8	1,000 x 870 x 580
46	Drive motor capacity (60 min. rating)	HP	kW	9.4	7	9.4	7	9.4	7	46	9.4	7	9.4	7	9.4	7
47	Lift output (15% rating) (36 / 48 volt)	HP	kW	15.4 / 20.8	11.5 / 15.5	15.4 / 20.8	11.5 / 15.5	15.4 / 20.8	11.5 / 15.5	47	16.1 / 22.1	12 / 16.5	16.1 / 22.1	12 / 16.5	16.1 / 22.1	12 / 16.5
48	Drive / hydraulic controls	type		AC transistor		AC transistor		AC transistor		48	AC transistor		AC transistor		AC transistor	
49	Relief pressure for attachments	bar	psi	180	2,610	180	2,610	180	2,610	49	180	2,610	180	2,610	180	2,610
50	Flow rate for attachments	gpm	lpm	7.9	30	7.9	30	7.9	30	50	7.9	30	7.9	30	7.9	30

Reliability.

It's the defining trait of our company and our forklifts.



UniCarriers' roots extend back over 100 years, and over that time, strong, reliable performance has always been the hallmark of our organization, our people and our equipment.

Today, our unrivaled reliability continues to provide UniCarriers' customers with a competitive edge. And together, we move the merchandise that moves world commerce with greater efficiency, economy and reliability.

When it comes to providing forklifts that make a difference for our customers and theirs...



We Never Quit.

UNICARRIERS
FORKLIFT

LogisnextAmericas.com/UniCarriers

SB-BXCQ 10-2025 Printed in U.S.A.

© 2025 Mitsubishi Logisnext Americas Inc. UniCarriers® is a registered trademark of Mitsubishi Logisnext Co., Ltd. Mitsubishi Logisnext Americas, Inc. reserves the right to make product changes relating to colors, equipment, specifications or available options without notice. For more information, contact your UniCarriers Forklift representative.

